


TYREX 8300

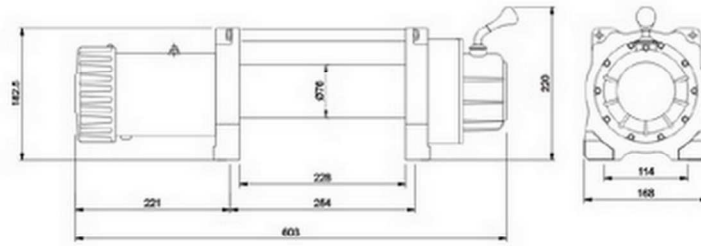

Line Speed / AMP Draw (First Layer)						
Line	lbs	No	2000	4000	6000	8288
Pull	kg	Load	907	1814	2722	3760
Line Speed	ft/min	65	19.7	14.1	12.5	11.2
	m/min	19.8	6.0	4.3	3.8	3.4
Motor	Amps 12V	58	160	220	280	360

8288 lbs Line Pull and Cable Capacity						
Layers of Cable		1	2	3	4	
Rated Line Pull Per Layer	lbs	8288	6400	5300	4700	
	kg	3760	2903	2404	2132	
Cable Capacity Per Layer	ft	19.6	43	72	105	
	m	6.0	13.2	22	32	

Rated Line Pull	8288lbs(3760kgs)
Winch Motor	Series wound 6.8hp/5kw DC 12V
Control	Remote Control
Gear Train	3-Stage Planetary
Gear Reduction Ratio	138:1
Clutch	Sliding Ring Gear
Brake Action	Automatic in drum
Drum Diameter	76mm
Drum Length	228mm
Steel Cable	Dia 8.3mmx28m
Fairlead	4-Way Roller Fairlead
Remote Control	Included
Battery	650CCA min. for winching
Battery Leads	25mm ² x1.8m
Dimensions	603mm l.x168mm d.x220mm h.
Mounting Bolt Pattern	254mm x 114.3mm
Weight	88lbs(40kgs)